



ANTI-SLIP STAIR TREAD COVER

Product Description

SafetyGrip anti-slip stair tread covers are constructed from heavy duty fire retardant polyester resins which incorporate our diamond hard aggregate surfaces. These FRP treads are extremely robust and hard wearing and offer superb levels of traction even in the harshest of environments.

SafetyGrip stair treads are supplied in a combination of surface grades that can be tailored to meet your specific application, with excellent chemical, corrosion and fire retardency properties they are designed to withstand the demands of a rigorous offshore/marine environment. Supplied in a variety of standard sizes, with bespoke customised sizes readily available.

Typical Applications

- All types of Steps & Stairwells
- Open Grating/Chequered Plate/Timber/Concrete

Benefits

- Heavy Duty/High Traction
- Standard & Custom Sizes
- Non-Corrosive
- Excellent Impact Resistance
- Fully Guaranteed
- Easy Installation

ANTI-SLIP STAIR TREAD COVER


Options

Sizes

A full range of standard and custom sizes are available.

		STANDARD SIZES							
A	B	(4") 100mm		(6") 150mm		(8") 200mm		(10") 250mm	
(18") 450mm		✓	2	✓	2	✓	2	✓	4
(24") 600mm		✓	2	✓	2	✓	2	✓	4
(30") 750mm		✓	3	✓	3	✓	3	✓	6
(36") 900mm		✓	3	✓	3	✓	3	✓	6
(42") 1050mm		✓	4	✓	4	✓	4	✓	8
(48") 1200mm		✓	4	✓	4	✓	4	✓	8

(number indicates recommended fixing quantities)

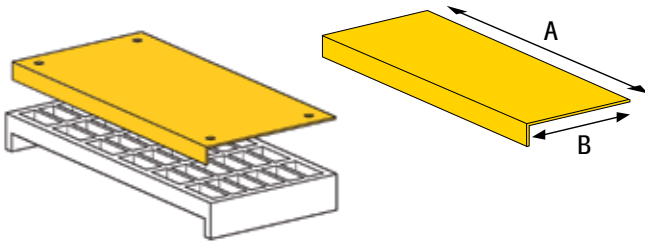

Colours

Typically supplied with high visibility colours; either Yellow or Black with Yellow Nosing; Custom colours are available on request.

Hazard Markings/Custom Logos

SafetyGrip Anti-slip Treads can incorporate various customised logos and safety hazard markings which are embossed on the surface of the product.

Anti-slip Grades

SURFACE GRADES	CODE	GRIT SIZE	APPLICATION
Fine	FG	2mm (1/16")	Light Industrial
Coarse	CG	4mm (3/16")	General Industrial
Extra Coarse	XCG	6mm (1/4")	Heavy Duty Industrial

Installation

SafetyGrip Anti-slip Stair treads can be fixed to all stair types using conventional mechanical fixings and adhesives.

Open Grating	Universal Saddle Clip Assembly
Chequer Plate	Nuts & Bolts/Tek Screws /Adhesive
Timber	Screws/Adhesive
Concrete	Hammer Fixings/Screws and Plugs

Specification

Physical Data

Finish:

Semi-rigid composite tread with pre-formed nose on leading edge

Grit Type:

Blended Aluminium Oxide/Granite

Nominal Thickness:

5 mm -9 mm (Depending on surface grade type)

Water/Chemical Absorption:

Less than 0.1%

Temperature Range:

-35 deg C to +95 deg C

Weight:

Fine Grade = 1.50kg/Linear metre

Coarse Grade = 1.85kg/Linear metre

Extra Coarse Grade = 2.25kg/Linear metre

(Weights based on tread width 200mm)

Test Data

Fire Testing:

BS476 Part 7, CLASS 2

EN ISO 11925-2

BS EN ISO 9293-1

Chemical Resistance:

Various compounds including most commonly used water & oil based drilling muds and fluids.

Coefficient of Friction Grip Test:

Friction test carried out using the pendulum CoF test -

Result show result between 0.85 - 0.95 wet and dry.

Transportation/Classification

Anti-slip treads are classed as non-hazardous and can be shipped through conventional methods.

Maintenance

Cleaning

Anti-slip surfaces should be cleaned at intermittent intervals to ensure they offer optimum performance, wash with water based detergent, stiff brush or high pressure washers/steam cleaners.

Cutting & Drilling

Anti-slip Treads can be easily cut and shaped on site to fit if necessary, tools to undertake such will include angle grinder/cutting disc - diamond blade will be most effective.

Holes need to be drilled from the underside using suitably sized tungsten tip masonry drill bits.

If in any doubt about an application please contact SafetyGrip Technical Services on: +44(0)1224 784700 info@safetygripsolutions.com